



SCIVAS LIMITED


YOUR VISION, OUR FREQUENCY

RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

WEBSITE: www.scivas.com

TEL: +86-20-87097510

Product Model: C3030-1

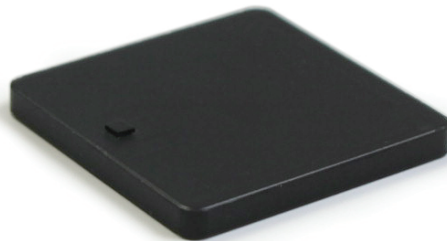



Functional Specifications:

RFID Protocol:	EPC Class1 Gen2, ISO18000-6C
Frequency:	US(902-928MHZ), EU(866-868MHZ)
IC type:	Alien Higgs-3
Memory:	EPC 96bits , USER 512bits, TID64bits
Write Cycles:	100,000 times
Functionality:	Read/write
Data Retention:	50 Years
Applicable Surface:	Metal Surfaces
Read Range : (Fix Reader)	10.0m , On metal
Read Range : (Handheld Reader)	7.0m , On metal
Warranty:	1 Year

Physical Specification:

Size:	30.0x30.0mm
Thickness:	3mm
Material:	Ceramic
Colour:	Black
Mounting Methods:	Adhesive
Weight:	14.0g

Dimensions:





SCIVAS LIMITED


YOUR VISION, OUR FREQUENCY

RFID Tags & Smart Cards, Precision-Engineered for Global Markets.

WEBSITE: www.scivas.com

TEL: +86-20-87097510

US:

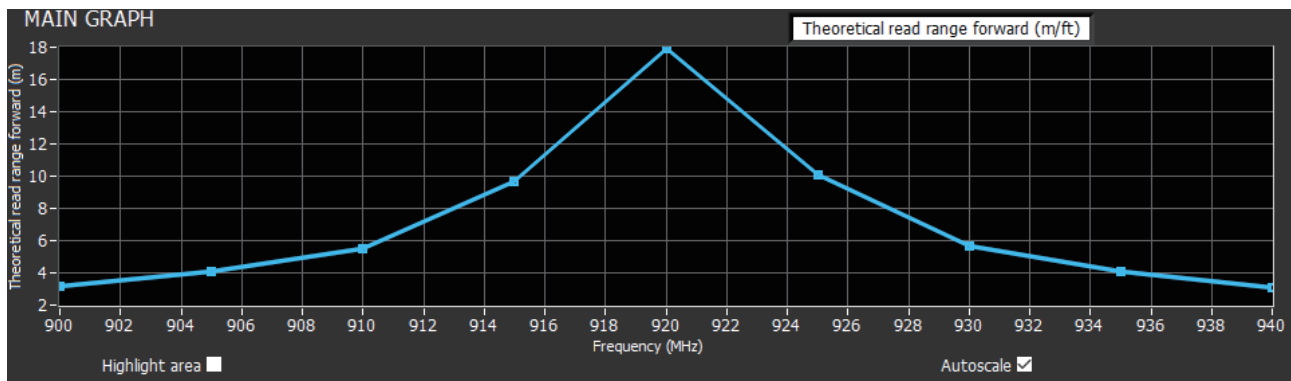

Environmental Specification:

IP Rating: IP68

Storage Temperature: -40°C to +150°C

Operation Temperature: -40°C to +85°C

Certifications: Reach Approved, RoHS Approved, CE Approved